



Description

- One-way pressure -relief vent for safety and long life.
 - Glue seal case-to-cover bond to eliminate leakage.
 - Absorbent Glass Mat (AGM) technology for efficient gas re-combination of up to 99% and freedom from electrolyte maintenance.
 - UL -recognized component
 - Monticello design for economy of installation and maintenance.
 - Can be mounted in any orientation. •
- Recharge in less than 24 hours.



Technical Data

Voltage	12V
Nominal 10 hr Capacity	64Ah
Weight	25.5kg
Terminal	Nut & Bolt (M6)
Service life	10 Years
Internal resistance	10m ohms

Capacity

10 Hour rate	80Ah
5 Hour rate	68Ah
3 Hour rate	60Ah
1 Hour rate	52Ah

Capacity affected by temperature

40C (104 °F)	102%
25C (77 °F)	100%
0C (32 °F)	85%


Constant Voltage Charge Cycle

Initial Charging Current less than 16.3A
 Voltage 14.1~15V at 25C (77 °F)
 Temperature Coefficient -30mV/C

Standby


No limit on Initial Charging Current
 Voltage 13.5~13.8V at 25C (77 °F)
 Temperature Coefficient -20mV/C

Discharge Characteristics(25°C/77 ° F)

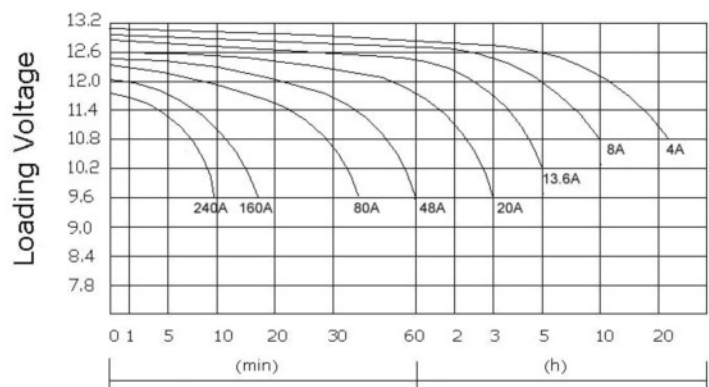

Discharge Time

Dimensions

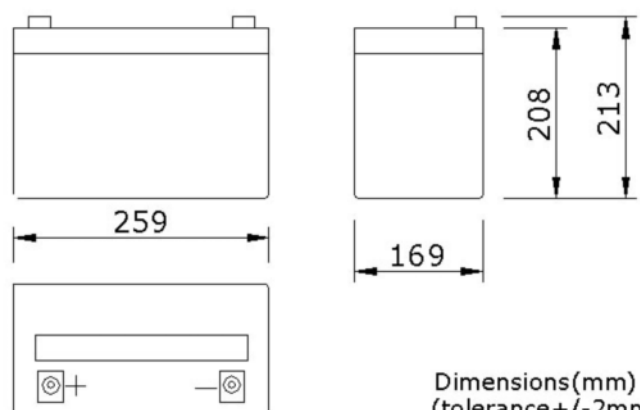

Dimensions(mm)
(tolerance +/- 2mm)